

ENVIRONMENTAL GEOLOGY NOTES

MAY, 1965 • NUMBER 2

from the Northeastern Illinois Office, Naperville

DATA FROM CONTROLLED
DRILLING PROGRAM IN
DU PAGE COUNTY, ILLINOIS

JEAN I. LARSEN

CHARLES R. LUND

ILLINOIS STATE GEOLOGICAL SURVEY

JOHN C. FRYE, Chief • Urbana

DATA FROM CONTROLLED DRILLING PROGRAM
IN DU PAGE COUNTY, ILLINOIS

Jean I. Larsen and Charles R. Lund

Descriptions of character and sequence of materials and data on relative consistency, natural water content, and grain-size distribution are given for glacial deposits, tested and sampled as a part of a controlled drilling program, at nine sites in DuPage County, northeastern Illinois.

INTRODUCTION

Data gathered from field and laboratory analyses of samples collected from nine holes drilled in DuPage County (fig. 1) are presented here. These holes were drilled as part of a study of water resources management in the six-county metropolitan area of northeastern Illinois. A total of 52 holes was drilled in the area to obtain data and samples of the subsurface unconsolidated materials, which are mainly glacial drift deposits. Data from the borings in the other five counties will appear in future issues of this series. The program was coordinated by the Northeastern Illinois Metropolitan Area Planning Commission and financed by a planning grant provided by the Federal Home and Housing Finance Agency. The work was supervised by the Illinois State Geological Survey, and drilling was performed under contract by the Layne-Western Company of Aurora, Illinois.

The first number of this series (Environmental Geology Notes 1, April 1965) gave the specific objectives of the drilling and sampling program, a description of the drilling methods and equipment used to obtain the samples, and an explanation of the methods used to perform the various tests made on the samples by both the contractor and the Illinois Geological Survey.

IDENTIFICATION SYSTEM

The numbering system used to identify the borings is based on the location of the boring. The number of each hole consists of the county abbreviation, township, range, section, and coordinates within the section. Sections are divided into rows of one-eighth-mile squares. Each square contains 10 acres and corresponds to a quarter of a quarter section. A normal section of one square mile contains eight rows of eighth-mile squares; an

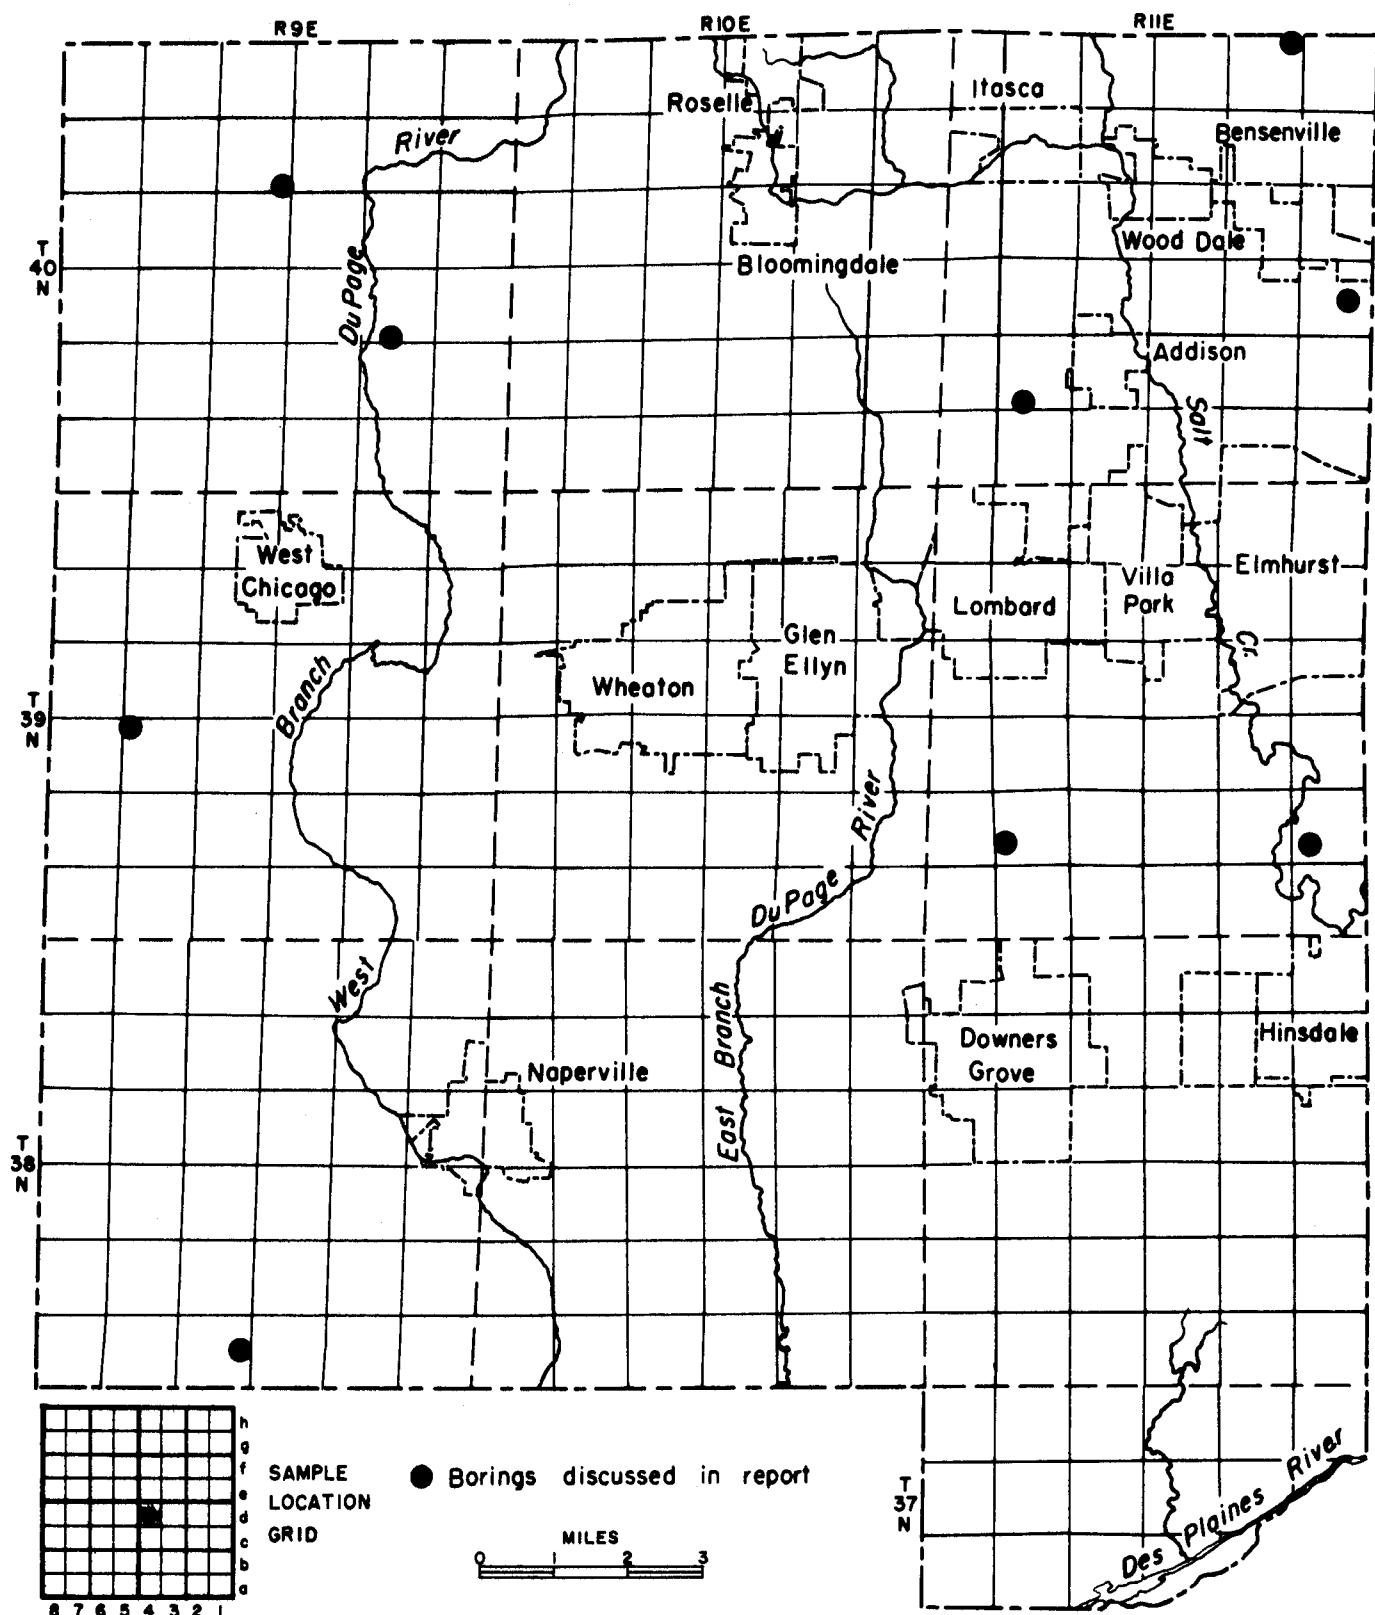


Fig. 1. - Location of borings in DuPage County.

odd-sized section contains more or fewer rows. Rows are numbered from east to west and lettered from south to north as shown in the grid on figure 1. For example, a well located in square 4d of section 30, township 39 north, range 9 east, would be numbered DUP 39N9E-30.4d. Where there is more than one boring in a 10-acre square they are identified by arabic numbers after the lower case letter in the boring number, for example, DUP 39N9E-30.4d2.

A location map is presented for each of the nine DuPage County borings, drawn on the scale of one inch equals 2000 feet, or 1:24,000, the scale of the United States Geological Survey 7½-minute quadrangle topographic maps. (These maps may be obtained from the Illinois State Geological Survey, Urbana, or from the U. S. Geological Survey, Washington, D.C.) The borings have been located within the 10-acre coordinate squares, with as much accuracy as this scale permits, according to detailed footage locations from easily recognizable landmarks supplied by the contractor.

EXPLANATION OF NOTES ON DRILLING RECORDS

The abbreviations and symbols used by the contractor on the drilling records included in this report are listed below.

Blows/ft - The number of blows of a 140-pound hammer falling 30 inches required to drive the split-barrel sampler for the last 12 inches of penetration.

81/2" - number of blows (81) required to drive a split-barrel sampler a certain number of inches (2").

Recovery (in.) - Length of the sample retained in the sampler.

Q_u - unconfined compressive strength expressed in tons per square foot (TSF).

MC - natural moisture content.

SS - split-barrel sampler 1 3/8 inches inside diameter (ID).

2S - split-barrel sampler 2 inches ID.

3S - split-barrel sampler 3 inches ID.

A - retractable-type auger.

W - wash sample.

RC - rock core.

AX - 1 3/16-inch diameter rock core.

The relations between descriptive terms for relative density and relative consistency and the quantitative expressions for these aspects of the materials are shown on page 4.

Relative Density		Relative Consistency	
Description	Blows/ft	Description	Qu in TSF
Very loose.....	0 - 5	Very soft.....	0.0 - 0.25
Loose.....	5 - 10	Soft.....	0.25 - 0.5
Medium dense.....	10 - 30	Medium.....	0.5 - 1.0
Dense.....	30 - 50	Stiff.....	1.0 - 2.0
Very dense.....	50+	Very stiff.....	2.0 - 4.0
		Hard.....	4.0+

Descriptions of materials given in the drilling records were made in the field by the sampler and are not necessarily consistent with the laboratory data. Stratigraphic interpretation of the borings is under study and is beyond the scope of this report.

SIZE-DISTRIBUTION ANALYSIS

Analysis of the density and grain-size distribution of the cohesive and noncohesive materials was carried out in the laboratories of the Illinois State Geological Survey in Urbana, Illinois. The Tyler sieves and their U. S. Standard equivalents used in the grain-size analyses, the diameter of the mesh openings in inches and millimeters, and the Wentworth grain-size classification are shown in the following table.

Sieve number		Mesh diameter		Grain-size classification (Wentworth)
U.S. Standard	Tyler	(in.)	(mm)	
4	4	0.185	4.699	Granules and pebbles (gravel) -----2.0 mm-----
10	9	0.078	1.981	
18	16	0.0390	0.991	
25	24	0.0276	0.701	
35	32	0.0195	0.495	
45	42	0.0138	0.351	
60	60	0.0097	0.246	Sand
80	80	0.0069	0.175	
120	115	0.0049	0.124	
170	170	0.0035	0.088	
230	250	0.0024	0.061	-----0.0625 mm----- Silt
				Hydrometer separation-----0.0039 mm----- Clay

The data presented in the size-distribution analysis for each boring is classified as follows:

gravel - >2.0 mm
 sand - <2.0 mm and >0.062 mm
 silt - <0.062 mm and >0.004 mm
 clay - <0.004 mm

Some of the sample numbers in the tables giving grain-size data on the cohesive and noncohesive materials have letter symbols added that indicate the following:

- A - Top bag of sample where two bags were used for a sampled interval.
 - B - Bottom bag of sample where two bags were used for a sampled interval.
 - U - Upper portion of sample where one bag was used for a sampled interval.
 - Bo - Lower portion of sample where one bag was used for a sampled interval.

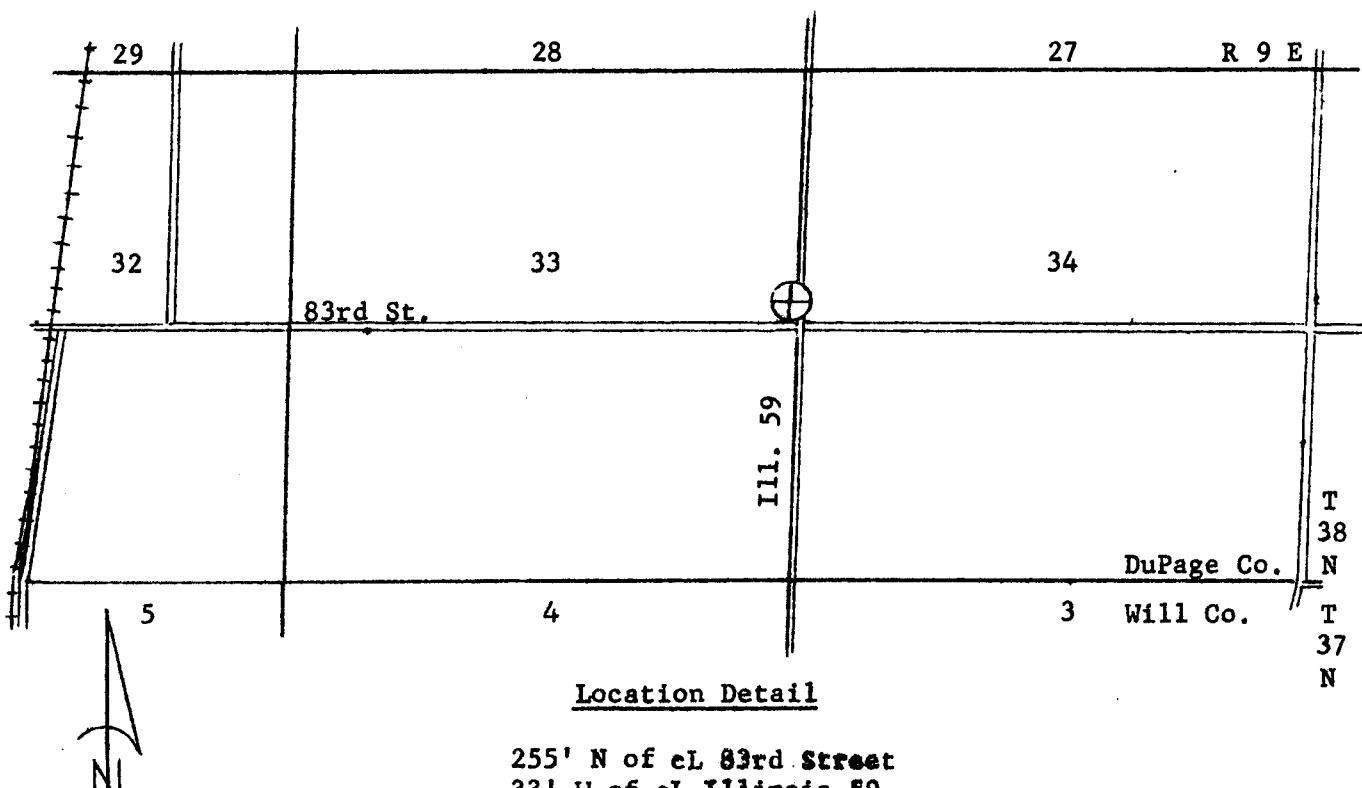


Fig. 2. - Location of boring DUP 38N9E-33.1e.

DRILLING RECORD FOR DUP 38N9E-33.1e

Surface elevation: 702.0 feet
 Date started: 12-17-62
 Date completed: 12-18-62

Hammer weight: 140 pounds
 Hammer drop: 30 inches
 Boring method: Hollow auger


Depth (ft)	Description of material	Samples					
		No.	Type	Depth (ft)	Recovery (in.)	Blows/ft hammer	Q _u
1.0	Topsoil, black	1	2S	2.0--3.5	14	17	7.8 25.0
5.0	Clay, silty, brown mottled with gray; local wash	2	2S	4.5--6.0	16	10	2.1 26.0
	Till -- clay, silty, brown; trace sand and gravel	3	2S	7.0--8.5	18	17	3.7 16.6
12.5		4	2S	9.5--11.0	8	23	2.3 15.8
		5	2S	12.0--13.5	18	41	8.2 17.8
15.0	Till -- clay, silty, gray; occasional pebbles	6	2S	14.5--16.0	6	57	
17.0	Sand, fine to medium, dark gray	7	2S	17.0--18.5	0	27	
		8	2S	19.5--21.0	6	23	
23.0	Till -- silt, sandy, brown-gray; some clay, cobbly & bouldery; varies to sand, silty, gravelly	9	SS	22.0--23.5	10	25	20.1
		10	SS	24.5--26.0	18	21	3.1 19.7
	Till -- clay, silty, gray; trace sand	11	SS	27.0--28.5	18	22	2.9 16.3
31.0		12	SS	29.5--31.0	12	53	1.4 18.2
33.3	Silt, gray; stratified sand partings	13	2S	32.0--33.5	12	37	
		14	SS	34.5--36.0	4	38	
37.5	Gravel, fine to coarse, sandy, gray; trace silt	15	SS	37.0--38.5	18	80	
40.8	Silt, gray; grades to fine sand at base of horizon	16	SS	39.5--41.0		45	
		17	SS	42.0--43.5	12	63	
	Gravel, sandy, fine to coarse, gray; trace silt below 43.5'	18	SS	44.5--46.0	18	83	
50.5		19	SS	47.0--48.5	18	105	
		21	W	47.0--52.0			
52.0	Broken rock (limestone)	20	SS	52.0	0	100/1"	
	Bottom of hole @ 52.0'						
	Hit water at 15'						

SIZE DISTRIBUTION DATA FOR DUP 38N9E-33.1e

Sample	Cohesive Materials		Size distribution of portion < 2.0 mm		
	% > 2.0 mm	% < 2.0 mm	% > .062 mm	% > .008 mm	% < .004 mm
3B	2.8	97.2	18	49	33
4	6.5	93.5	17	50	33
5B	1.8	98.2	6	50	44
6U	9.0	91.0	74	21	5
9B	2.0	98.0	8	37	55
10	7.0	93.0	11	33	56
11A	28.0	72.0	20	33	47
12	0.0	100.0	8	70	22
13T	1.2	98.8	16	52	32
16	0.0	100.0	39	59	2
17	43.0	57.0	72	26	2

Noncohesive Materials

Sample	Percentage retained on sieve										
	4	9	16	24	32	42	60	80	115	170	Paq
6Bo	4.0	5.3	13.9	4.9	6.6	7.8	10.2	7.1	6.9	5.8	27.5
18	22.8	15.8	15.0	6.2	7.4	5.6	4.2	2.6	2.3	1.9	11.2
19	23.9	9.6	9.5	2.8	3.1	5.6	16.2	11.9	5.9	3.0	9.3

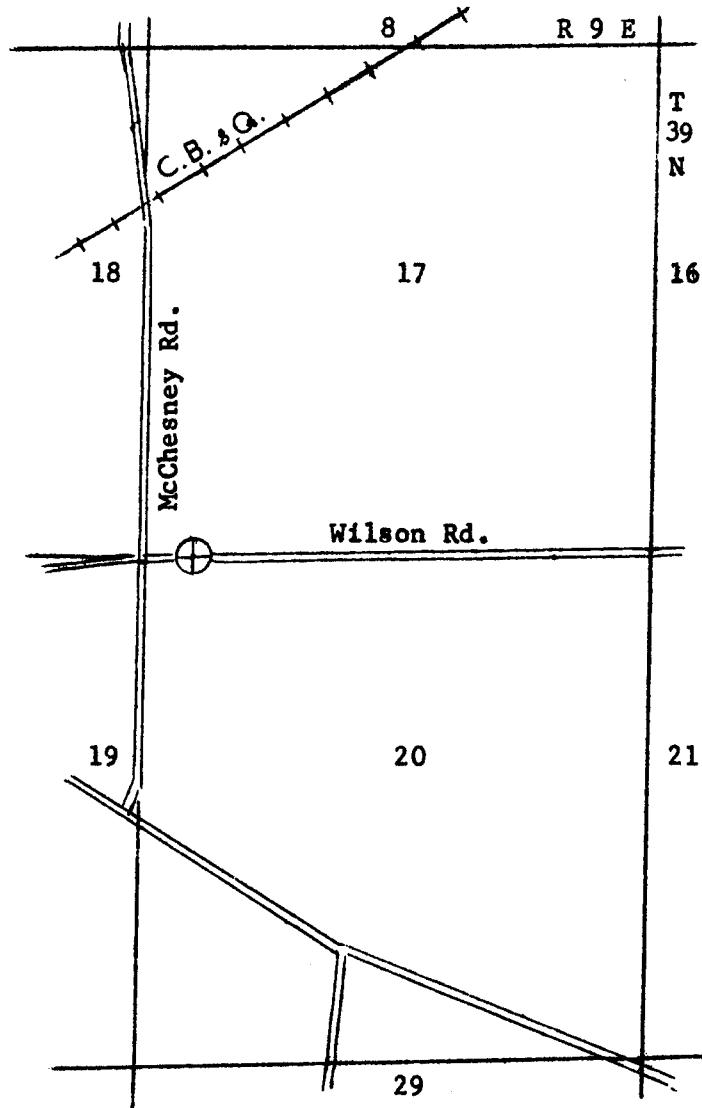

Location Detail

500' E of cL McChesney Road
18' S of cL Wilson Road
(18' S, 500' E of NWc, sec. 20)
Naperville Quadrangle



Fig. 3. - Location of boring DUP 39N9E-20.8h.

DRILLING RECORD FOR DUP 39N9E-20.8h

Surface elevation: 742.0 feet
Date started: 10-22-62
Date completed: 10-23-62

Hammer weight: 140 pounds
Hammer drop: 30 inches
Boring method: Hollow auger

Depth (ft)	Description of material	Samples						
		No.	Type	Depth (ft)	Recovery (in.)	Blows/ft drop hammer	Q _u	MC
8.0	Clay, silty, to silt, clayey, brown mottled with gray; local wash	1	2S	2.0—3.5	15	11	1.6	28.2
		2	2S	4.5—6.0	9	9		21.1
		3	2S	7.0—8.5	13	11		
13.0	Silt, brown; grades to sandy silt	4	2S	9.5—11.0	12	12		
		5	2S	12.0—13.5	8	17		
		6	2S	14.5—16.0	13	17	2.8	14.9
32.5	Till — clay, silty, gray; trace sand and gravel; few cobbles; gravel seams	7	2S	17.0—18.5	15	43	1.4	14.5
		8	2S	19.5—21.0	18	20	3.8	14.3
		9	2S	22.0—23.5	18	28	4.4	15.4
		10	2S	24.5—26.0	18	21	3.1	16.6
		11	2S	27.0—28.5	18	21	3.0	18.4
		12	2S	29.5—31.0	18	22	3.8	13.5
34.0	Till — silt, clayey, sandy, gray	13	2S	32.0—33.5	9	16		
44.0	Till — clay, silty, sandy, gray; gravel seams	14	2S	34.5—36.0	18	20		
		15	2S	37.0—38.5	18	38	5.2	9.4
		16	2S	39.5—41.0	16	34	2.9	12.3
		17	2S	42.0—43.5	2	38		
		18	2S	44.5—46.0	18	25	3.3	12.3
54.0	Till — clay, silty, cobbly, gray	19	2S	47.0—48.5	18	33	2.7	11.1
		20	2S	49.5—51.0	18	37	3.3	12.3
		21	2S	52.0—53.5	16	27	4.2	12.9
		22	2S	54.5—56.0	7	30	1.3	14.4
		23	2S	57.0—58.5	10	36	3.9	16.2

(Continued)


DRILLING RECORD FOR DUP 39N9E-20.8h - Continued

Depth (ft)	Description of material	Samples						
		No.	Type	Depth (ft)	Recovery (in.)	Blows/ft	drop hammer	Q _u
	Till -- clay, gray, wet	24	2S	59.5--61.0	18	21	3.8	17.5
68.5		25	2S	62.0--63.5	18	48	1.6	18.2
69.1 *		26	2S	64.5--66.0	18	14	2.1	17.6
	Bottom of hole @ 69.1'	27	2S	67.0--68.5	12	47	0.8	19.4
		28	2S	69.0--69.1	1	100/1"		

* Limestone fragments, tan; trace clay, silty, gray

SIZE DISTRIBUTION DATA FOR DUP 39N9E-20.8h

Sample	Cohesive Materials					
	% > 2.0 mm	% < 2.0 mm	Size distribution of portion < 2.0 mm			
			% > .062 mm	% > .004 mm	% < .004 mm	
1	0.0	100.0	5	60	35	
2	0.0	100.0	6	72	22	
3	0.2	99.8	25	64	11	
4	0.0	100.0	10	82	8	
5	0.2	99.8	11	79	10	
6	1.3	98.7	10	53	37	
7	1.0	99.0	13	57	30	
8	2.0	98.0	10	58	32	
9	1.0	99.0	4	55	41	
10	2.0	98.0	12	58	30	
11	1.0	99.0	7	65	28	
12	13.0	87.0	5	58	37	
13	15.0	85.0	36	49	15	
14	16.0	84.0	34	50	16	
15A	11.0	89.0	33	37	30	
15B	16.0	84.0	37	48	15	
16	8.0	92.0	27	58	15	
18	11.0	89.0	26	47	27	
19	7.0	93.0	27	45	28	
20	4.0	96.0	23	47	30	
21	6.0	94.0	23	44	33	
22	9.0	91.0	21	46	33	
23	4.0	96.0	17	41	42	
24	4.0	96.0	17	43	40	
25	6.0	94.0	16	40	44	
26	8.0	92.0	15	44	41	
27	3.0	97.0	15	42	43	

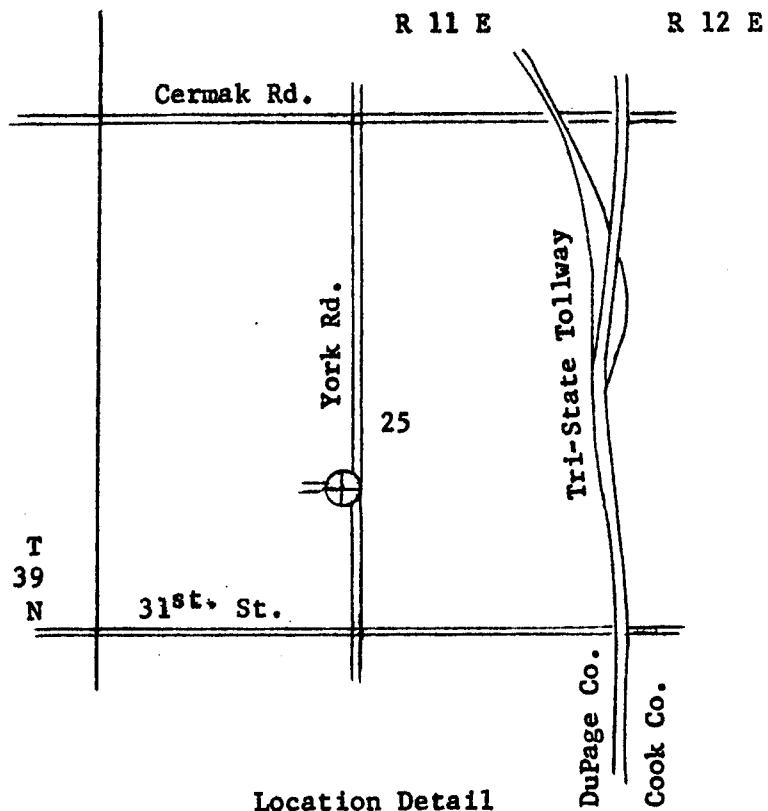

125' S of private drive
34' W of cL York Road
2525' E, 1450' N of SW_c
Berwyn Quadrangle

Fig. 4. - Location of boring DUP 39N11E-25.5c.

DRILLING RECORD FOR DUP 39N11E-25.5c

Surface elevation: 665.0 feet

Hammer weight: 140 pounds

Date started: 12-11-62

Hammer drop: 30 inches

Date completed: 12-13-62

Boring method: Hollow auger


Depth (ft)	Description of material	Samples						
		No.	Type	Depth (ft)	Recovery (in.)	Blows/ft hammer	Q _u	MC
1.5	Topsoil, black	1	2S	2.0—3.5	8	12	1.4	25.2
7.0	Clay, silty, brown mottled with gray	2	2S	4.5—6.0	12	15	3.5	21.7
11.5	Till — clay, silty, brown; trace sand and gravel	3	2S	7.0—8.5	1	16		
		4	2S	9.5—11.0	6	50		17.5
		5	2S	12.0—13.5	18	20	2.7	15.4
		6	2S	14.5—16.0	14	23		5.9
21.5	Till — clay, silty, gray; occasional pebbles; almost free of sand	7	2S	17.0—18.5	14	15		18.6
		8	2S	19.5—21.0	18	14		21.7
25.0	Till → sand, clayey, gray; little silt-sand pockets	9	2S	22.0—23.5	12	14		12.6
		10	2S	24.5—26.0	18	19		23.3
30.0	Till — clay, silty, gray; trace shale sand	11	2S	27.0—28.5	18	18		21.5
		12	2S	29.5—31.0	18	43		14.0
		13	2S	32.0—33.5	18	45		
		14	SS	34.5—36.0	18	100		
		15	SS	39.5—41.0	6	60		
		16	SS	44.5—46.0	8	31		18.4
43.5		17	SS	47.0—48.5	12	59		
		18	SS	49.5—50.0			Refusal	
47.5	Clay, gray; some silt and silt partings	19	AX	50.0—51.5				
50.0	Sand, fine, gray							
51.5	Limestone, gray							
	Bottom of hole @ 51.5'							

SIZE DISTRIBUTION DATA FOR DUP 39N11E-25.5c

Sample	Cohesive Materials			Size distribution of portion < 2.0 mm		
	% > 2.0 mm	% < 2.0 mm	%	>.062 mm	>.004 mm	<.004 mm
1	4.0	96.0	17		38	45
3	3.0	97.0	19		43	38
5A	7.0	93.0	20		48	32
8B	2.0	98.0	.9		42	49
9A	26.0	74.0	48		40	12
10B	1.0	99.0	7		40	53
12A	2.0	98.0	20		41	39
13	9.0	91.0	26		40	34

Noncohesive Materials

Sample	Percentage retained on sieve										
	4	9	16	24	32	42	60	80	115	170	Pan
14	0.0	0.3	1.7	4.2	18.7	28.4	24.2	9.3	5.1	2.2	5.9
15	93.9	4.4	1.0	0.2	0.2	0.1	0.1	0.0	0.0	0.0	0.1
19	0.0	0.3	0.6	3.9	14.8	16.9	19.9	13.2	14.6	7.1	8.7

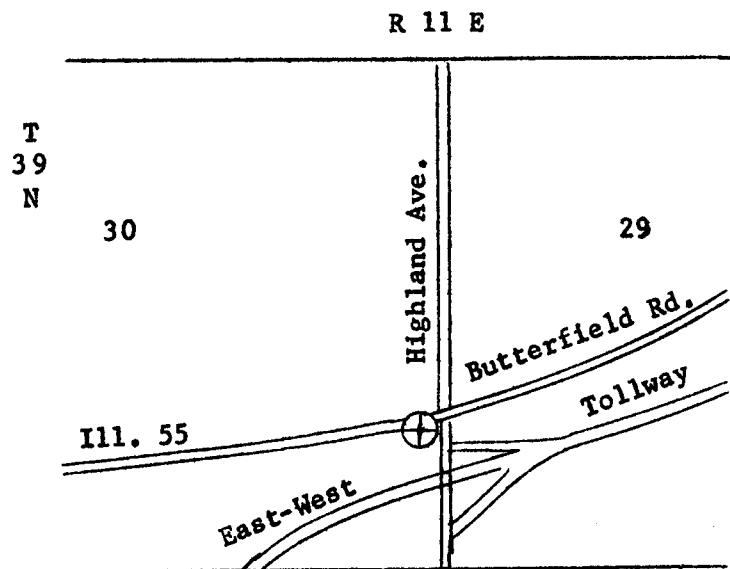

Location Detail

6' S of Illinois 55 pavement
200' W of Highland Avenue pavement
1150' E, 1600' N of SW_c
Wheaton Quadrangle

ZJ

Fig. 5. - Location of boring DUP 39N11E-29.7c.

DRILLING RECORD FOR DUP 39N11E-29.7c

Surface elevation: 767.0 feet
Date started: 11-29-62

Hammer weight: 140 pounds
Hammer drop: 30 inches
Boring method: Hollow auger

Depth (ft)	Description of material	Samples					
		No.	Type	Depth (ft)	Recovery (in.)	Blows/ft drop hammer	Q _u
1.5	Gravel fill	1	2S	2.0—3.5	18	32	4.1 15.3
4.5	Till — clay, silty, brown; trace sand and fine gravel	2	2S	4.5—6.0	18	22	4.0 13.2
		3	2S	7.0—8.5	18	27	2.7 13.9
		4	2S	9.5—11.0	18	38	3.8 17.0
		5	2S	12.0—13.5	18	22	5.2 16.6
16.5	Till — clay, silty, brown to gray; trace of gravel	6	2S	14.5—16.0	18	27	5.2 16.7
		7	2S	17.0—18.5	18	14	2.2 9.9
		8	2S	19.5—21.0	16	22	2.9 14.4
24.0	Till — clay, silty, gray; trace gravel; thin sand seam at 18'	9	2S	22.0—23.5	0	20	4.4 15.1
		10	2S	24.5—26.0	14	28	5.2 13.3
		11	2S	27.0—28.5	18	32	5.2 13.6
30.5	Till — clay, silty, gray, pebbly	12	2S	29.5—31.0	17	29	4.3 11.6
34.0	Till — clay, silty, gray- brown	13	2S	32.0—33.5	18	29	5.2
		14	2S	34.5—36.0	18	38	5.2 14.2
		15	2S	37.0—38.5	18	27	5.6 11.4
41.5	Till — clay, silty, gray, pebbly	16	2S	39.5—41.0	17	32	2.5 13.2
		17	2S	42.0—43.5	18	21	
		18	2S	44.5—46.0	14	18	1.5 20.0
		19	2S	47.0—48.5	17	27	2.5 21.9
	Silt, clayey, brown to gray, with thin seams of sand and silt; a few pebbles	20	2S	49.5—51.0	18	23	1.5 17.5
		21	2S	52.0—53.5	18	23	2.5 19.0
56.5	(Sample described on next page)	22	2S	54.5—56.0	18	29	1.7 22.6
		23	2S	57.0—58.5	18	35	2.3 15.2

DRILLING RECORD FOR DUP 39N11E-29.7c - Continued

Depth (ft)	Description of material	Samples						
		No.	Type	Depth (ft)	Recovery (in.)	Blows/ft hammer	drop hammer	Q _u
70.5	Silt, gray; trace of fine sand at 62'	24	2S	59.5-61.0	18	30	3.5	21.8
		25	2S	62.0-63.5	18	26		22.4
		26	2S	64.5-66.0	18	52	4.5+	18.8
		27	2S	67.0-68.5	16	81	4.5+	18.9
75.0	Till - clay, silty, gray; trace gravel	28	2S	69.5-71.0	12	94	4.5+	14.6
		29	2S	72.0-73.5	15	69	4.9	12.7
81.5	Till - silt, sandy, gray; grades to clayey silt, pebbly	30	2S	74.5-76.0	18	60	2.3	15.6
		31	2S	77.0-78.5	16	91	3.3	8.9
90.5	Till - clay, silty, sandy, gray; trace of gravel; seam of sandy silt at 85'-87.5'	32	2S	79.5-81.0	0	108		
		33	2S	82.0-83.5	18	58	4.6	13.0
		34	2S	84.5-86.0	14	101	5.2+	14.4
		35	2S	87.0-88.5	15	103	3.0	15.5
94.0	Till - silt, clayey, gray, sandy, pebbly	36	2S	88.5-91.0	18	120		11.8
101.5	Till - clay, silty, gray	37	2S	92.0-93.5	12	63	9.4	9.4
		38	SS	94.5-96.0	7	46	2.7	14.0
114.0	Sand, silty, very fine, gray; grades to sandy silt at 114'	39	SS	97.0-98.5	15	45	5.6	19.8
		40	SS	99.5-101.0	9	71		12.0
	Silt, clayey, gray, with seams of clay; sand and silt, very pebbly	41	SS	102.0-103.5	0	46		
		42	SS	104.5-106.0	12	108		
		43	SS	109.5-110.5	2	150		
		44	SS	112.0-113.5	5	105		
		45	SS	114.5-116.0	10	97		12.1
		46	SS	117.0-118.5	10	230		11.8
		47	SS	119.5-121.0	7	157		17.2
		48	SS	122.0-123.0	12	50		18.1


(Continued)

DRILLING RECORD FOR DUP 39N11E-29.7c - Continued

Depth (ft)	Description of material	Samples						
		No.	Type	Depth (ft)	dry (in.)	Recov- drop hammer	Blows/ft	Qu
	(Description on preceding page.)	49	SS	124.5—126.0	12	122	1.8	19.6
129.0		50	SS	129.5—131.0	6	155		
	Sand, silty, medium to coarse, gray, cobbley	51	SS	134.5—135.0	4	88		
		52	SS	136.0—136.8	3	128/8"		
		53	W	136.8—140.0				
140.0		54	W	140.0—145.0				
	Sand, fine, brown	55	RC	145.0—150.0	7			14.4
145.0								
150.0	Till — silt, clayey, gray, pebbly							

SIZE DISTRIBUTION DATA FOR DUP 39N11E-29.7c

Sample	%	>2.0 mm	% <2.0 mm	Size distribution of portion			<2.0 mm		
				%	>.062 mm	%	>.004 mm	%	<.004 mm
1A		9.0	91.0		21		48		31
2A		4.0	96.0		20		51		29
3A		6.0	94.0		26		48		26
4A		2.0	98.0		13		39		48
5A		5.0	95.0		15		46		39
6A		6.0	94.0		15		45		40
7A		18.0	82.0		16		47		37
10A		6.0	94.0		14		44		42
12A		5.0	95.0		21		45		34
13A		16.0	84.0		27		47		26
14A		6.0	94.0		16		42		42
17A		4.0	96.0		48		45		7
19A		0.0	100.0		6		70		24
22A		0.0	100.0		1		54		45
23A		0.0	100.0		16		74		10
25A		0.0	100.0		2		87		11
27B		4.0	96.0		15		69		16
28		23.0	77.0		7		75		18
29B		3.0	97.0		15		59		26
30B		5.0	95.0		15		58		27
33B		17.0	83.0		31		51		18
35B		13.0	87.0		20		54		26
37		7.0	93.0		32		53		15
38A		11.0	89.0		17		50		33
39B		1.0	99.0		1		52		47
40		7.0	93.0		20		50		30
42		0.0	100.0		52		35		13
44		3.0	97.0		11		74		15
47		0.0	100.0		9		66		25
49		0.0	100.0		2		59		39
50		58.0	42.0		52		43		5
55		20.0	80.0		29		43		28

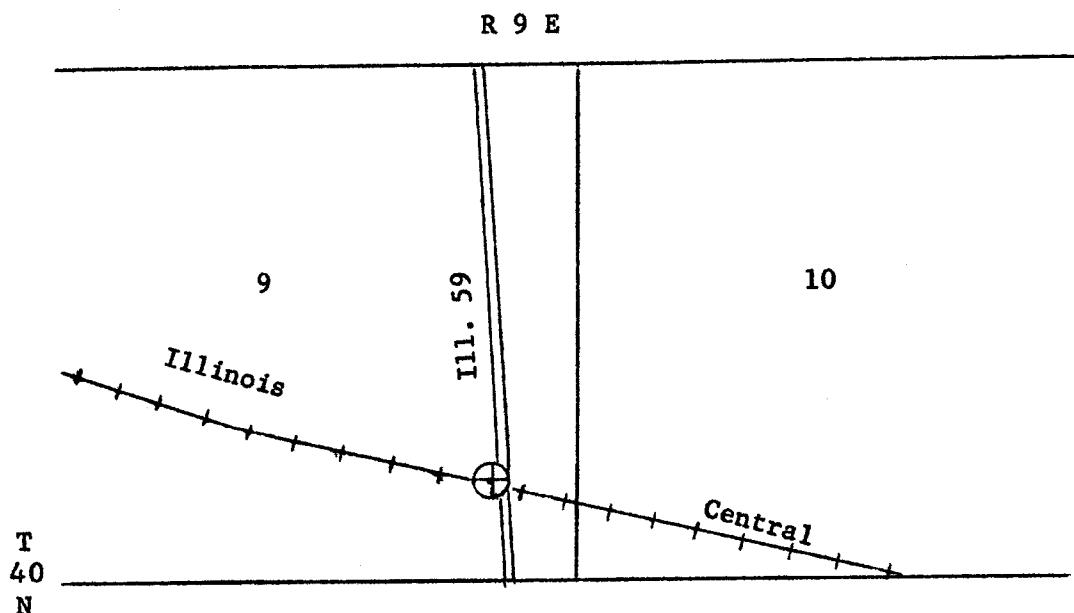

Location Detail

50° N cL I.C.R.R.
40° E cL Illinois 59
600' W, 900' N of SE_c
Naperville Quadrangle



Fig. 6. - Location of boring DUP 40N9E-9.1b.

DRILLING RECORD FOR DUP 40N9E-9.1b

Surface elevation: 795.0 feet
Date started: 10-26-62
Date completed: 10-30-62

Hammer weight: 140 pounds
Hammer drop: 30 inches
Boring method: Hollow auger

Depth (ft)	Description of material	Samples						
		No.	Type	Depth (ft)	Recovery (in.)	Blows/ft drop hammer	Q _u	MC
	Clay, silty, black mottled with tan; trace sand	1	2S	2.0— 3.5	8	14	4.5	21.4
8.0	6" organic layer	2	2S	4.5— 6.0	12	7	1.2	25.1
10.0	Till — clay, silty, brown; trace sand and gravel	3	2S	7.0— 8.5	18	17	4.5	8.1
		4	2S	9.5—11.0	18	18	3.2	15.7
16.0	Till — clay, silty, gray; trace sand and gravel	5	2S	12.0—13.5	18	21	3.2	17.3
		6	2S	14.5—16.0	18	12	3.2	
		7	2S	17.0—18.5	14	25		
		8	SS	19.5—21.0	2	50		
		9	2S	22.0—23.5	6	47		
26.5		10	2S	24.5—26.0	16	43		
28.0	Silt, gray; trace sand; few cobbles	11	2S	27.0—28.5	2	12		
		12	2S	29.5—31.0	8	37		
		13	SS	32.0—33.5	5	25		
		14	SS	34.0—35.5	4	19		
		15	SS	44.0—45.5	10	11		
	Gravel, sandy, gray; trace silt and clay	16	W	45.5—50.5				
		17	SS	54.0—55.5	18	19	2.7	16.3
		18	SS	56.5—58.0	6	16	2.5	18.5
		19	SS	59.0—60.5	7	12	2.3	17.4
53.0		20	2S	61.5—63.0	11	30	4.0	18.1
		21	2S	64.0—65.5	18	25	2.1	22.4
	Silt, clayey, grayish yellow-brown; trace pebbles	22	2S	66.5—68.0	18	33		12.2
58.0		23	2S	69.0—70.5	15	19		12.3
	(Lower part of sample 23 described on next page.)							

DRILLING RECORD FOR DUP 40N9E-9.1b - Continued


Depth (ft)	Description of material	Samples						
		No.	Type	Depth (ft)	Recovery (in.)	Blows/ft drop hammer	Qu	MC
66.0	Clay, silty, gray, with silt layers	24	2S	71.5-73.0	14	33		10.4
		25	2S	74.0-75.5	12	40		10.5
		26	2S	76.5-78.0	18	31	2.0	11.5
	Till - silt, sandy, yellow, gray-brown; a little gravel; turns gray at 71', with a little clay	27	2S	79.0-80.5	4	150/4"		
		28	2S	81.5-83.0	18	40	3.2	11.5
		29	2S	84.0-85.5	18	45	4.5	11.2
79.5		30	2S	86.5-88.0	18	26		
	Till - silt, clayey, gray, sandy; trace gravel	31	2S	89.0-90.5	10	110		
88.5								
91.5	Gravel, sandy, coarse, gray, cobbley, angular							
	Bottom of hole @ 91.5'							

SIZE DISTRIBUTION DATA FOR DUP 40N9E-9.1b

Sample	Cohesive Materials			Size distribution of portion < 2.0 mm		
	% > 2.0 mm	% < 2.0 mm	% >.062 mm	% >.004 mm	% <.004 mm	
1	3.0	97.0	13	50	47	
2	3.0	97.0	12	44	44	
3A	8.0	92.0	14	42	44	
3B	5.0	95.0	15	43	42	
4A	4.0	96.0	16	40	44	
5	4.0	96.0	16	43	41	
6	4.0	96.0	19	43	38	
7A	12.0	88.0	34	57	9	
7B	0.2	99.8	9	85	6	
10	5.0	95.0	14	80	6	
15B	50.0	50.0	68	26	6	
17	17.0	83.0	44	22	34	
18	1.0	99.0	10	60	30	
19	1.0	99.0	5	54	41	
20	1.0	99.0	3	49	48	
21	0.0	100.0	0	76	24	
22	8.0	92.0	41	43	16	
23	7.0	93.0	41	48	11	
24	9.0	91.0	37	45	18	
25	16.0	84.0	37	45	18	
26	7.0	93.0	32	45	23	
28	8.0	92.0	29	46	25	
29	16.0	84.0	28	44	28	

Noncohesive Materials

Sample	Percentage retained on sieve										
	4	9	16	24	32	42	60	80	115	170	Pan
12	37.1	13.8	16.5	4.6	5.4	4.3	4.9	3.2	2.5	1.5	6.2
15U	37.0	13.1	7.3	2.5	3.5	3.3	4.1	3.3	3.6	3.1	19.2

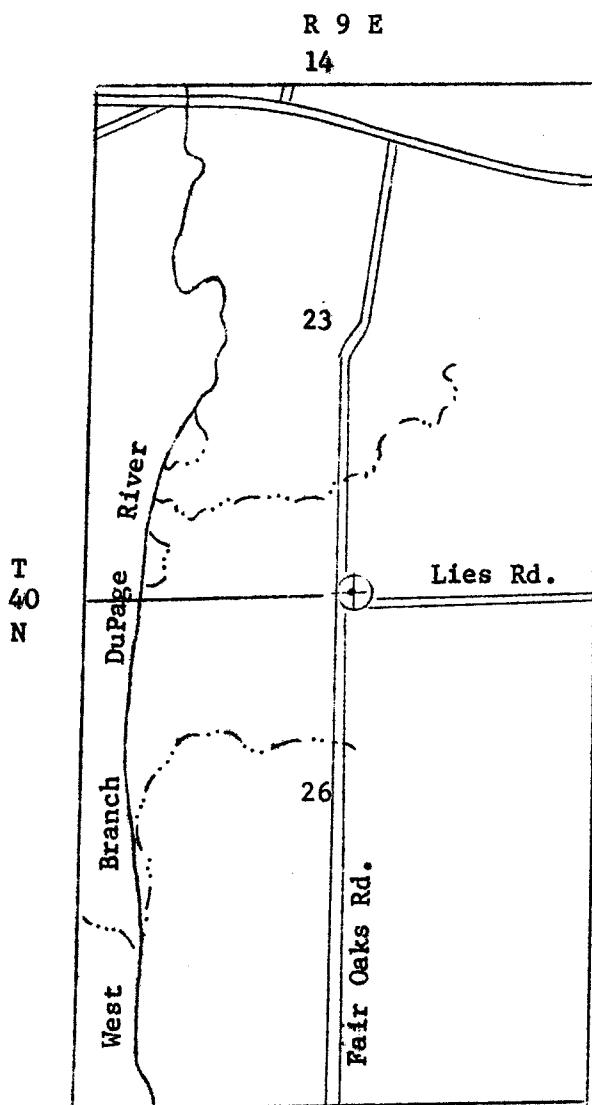

Location Detail

92° E cL Fair Oaks Road
22° N cL Lies Road
22° N, 2500' W of SE_c
West Chicago Quadrangle

Fig. 7. - Location of boring DUP 40N9E-23.4a.

DRILLING RECORD FOR DUP 40N9E-23.4a

Surface elevation: 762.0 feet
 Date started: 10-23-62
 Date completed: 10-25-62

Hammer weight: 140 pounds
 Hammer drop: 30 inches
 Boring method: Hollow auger

Depth (ft)	Description of material	Samples					
		No.	Type	Depth (ft)	Recovery (in.)	Blows/ft drop hammer	Q _u
4.0	Clay, brown and black mottled; possibly fill	1	2S	2.0—3.5	16	19	1.7 24.1
		2	2S	4.5—6.0	12	13	1.7 25.1
11.5	Clay, brown; a few pebbles	3	2S	7.0—8.5	18	16	3.3 23.1
		4	2S	9.5—11.0	18	33	4.6 14.3
	Till — clay, silty, brown; a few pebbles and cobbles	5	2S	12.0—13.5	18	30	5.0 14.8
18.0		6	2S	14.5—16.0	18	24	3.2 10.8
		7	2S	17.0—18.5	18	22	3.6 15.4
		8	2S	19.5—21.0	17	19	2.9 16.2
		9	2S	22.0—23.5	18	21	17.6
32.0	Till — clay, gray; trace of yellow mottling; sand, gravel and cobbles	10	2S	24.5—26.0	16	28	3.6 18.2
		11	2S	27.0—28.5	12	25	3.7 19.1
		12	2S	29.5—31.0	18	22	2.5 12.6
		13	2S	32.0—33.5	18	27	2.1 16.0
41.5	Till — silt, clayey, gray-brown; trace sand and gravel	14	2S	34.5—36.0	18	34	4.0 13.5
		15	2S	37.0—38.5	18	20	2.7 13.7
		16	2S	39.5—41.0	18	36	4.3 15.7
46.0	Till — clay, silty, gray; some cobbles; some brown sand seams	17	2S	42.0—43.5	18	65	
		18	2S	44.5—46.0	18	26	
49.5	Till — clay, gray; a few pebbles	19	2S	47.0—48.5	15	26	4.6 12.8
		20	2S	49.5—51.0	12	29	
		21	2S	52.0—53.5	7	34	
		22	2S	54.5—56.0	4	50	
		23	2S	57.0—58.5	5	118	

(Continued)

DRILLING RECORD FOR DUP 40N9E-23.4a - Continued

Depth (ft)	Description of material	Samples					
		No.	Type	Depth (ft)	Recovery (in.)	Blows/ft drop hammer	Q _u MC
68.0	Till — silt, sandy, gray; some coarse sand and gravel	24	2S	59.5—61.0	3	150	
		25	2S	62.0—63.5	0	169	
		26	2S	64.5—66.0	4	34	
		27	2S	67.0—68.5	4	30	
		28	2S	69.5—71.0	5	42	
	Clay, gray; trace silt, sand and gravel; sand pockets	29	2S	74.5—76.0	18	43	
83.0		30	2S	77.5—81.0	18	38	
		31	2S	84.5—86.0	14	132	
		32	2S	89.5—91.0	10	150	
	Sand, fine, gray to brown, sorted	33	2S	94.5—96.0	2	38	
		34	2S	97.0	0	152	
97.0	Bottom of hole @ 97' Hit water @ 42' Sand pockets heaved up into auger 9' from 67' to 97'. Bedrock appeared to be dolomite.						

SIZE DISTRIBUTION DATA FOR DUP 40N9E-23.4a

Sample	Cohesive Materials			Size distribution of portion < 2.0 mm		
	% > 2.0 mm	% < 2.0 mm	% >.062 mm	% >.004 mm	% <.004 mm	
2	2.0	98.0	11	38	51	
3	1.0	99.0	12	37	51	
4	3.0	97.0	14	39	47	
5	3.0	97.0	13	43	44	
6	2.0	98.0	13	41	46	
7	2.0	98.0	13	43	44	
8	1.0	99.0	14	41	45	
9	3.0	97.0	14	44	42	
10	1.0	99.0	6	41	53	
11	1.0	99.0	5	38	57	
12	5.0	95.0	16	52	32	
13	4.0	96.0	18	47	35	
14	2.0	98.0	10	49	41	
15	3.0	97.0	11	45	44	
16	1.0	99.0	6	52	42	
17	4.0	96.0	13	46	41	
18	8.0	92.0	18	51	31	
19	10.0	90.0	25	45	30	
20	1.0	99.0	5	90	5	
29	7.0	93.0	29	44	27	

Noncohesive Materials

Sample	Percentage retained on sieve										Pan
	4	9	16	24	32	42	60	80	115	170	
31	1.6	5.1	14.7	7.1	8.1	7.3	8.5	7.5	10.9	10.1	19.1
32	8.4	21.5	44.4	13.4	6.9	2.2	1.3	0.5	0.3	0.1	1.0

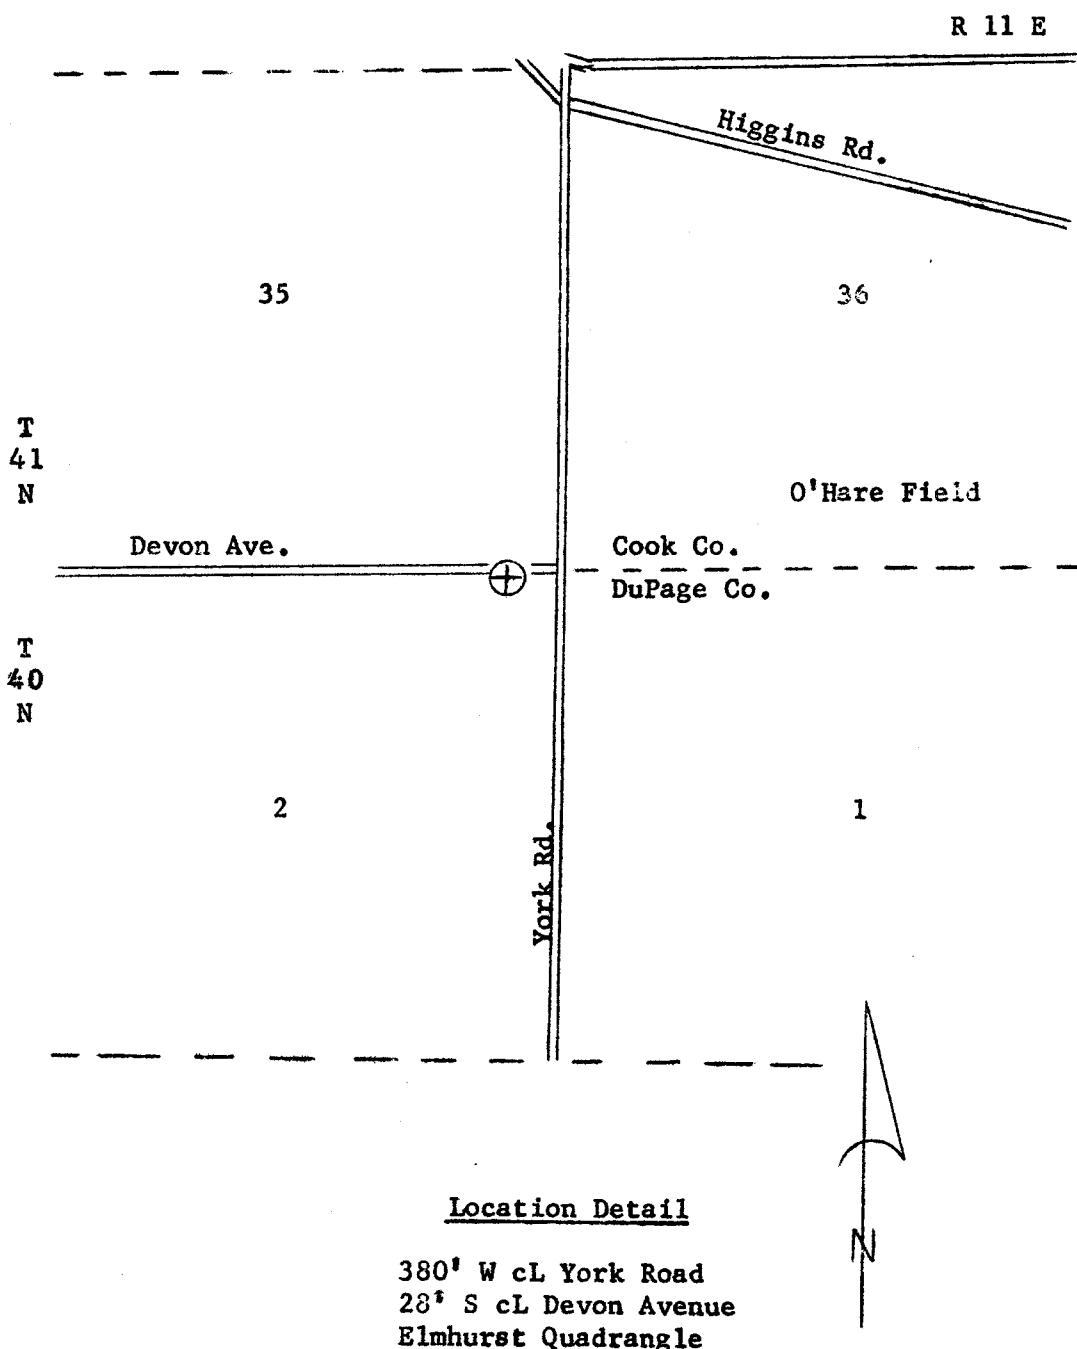


Fig. 8. - Location of boring DUP 40N11E-2.1h.

DRILLING RECORD FOR DUP 40N11E-2.1h

Surface elevation: 672.0 feet
 Date started: 11-26-62
 Date completed: 11-28-62

Hammer weight: 140 pounds
 Hammer drop: 30 inches
 Boring method: Hollow auger

Depth (ft)	Description of material	Samples						
		No.	Type	Depth (ft)	Recover- ery (in.)	Blows/ft hammer	Q _u	MC
1.0	Topsoil, black	1	2S	2.0--3.5	14	11	1.6	16.5
9.0	Clay, silty, brown mottled with gray, sandy; sand seams, pebbly	2	2S	4.5--6.0	18	16	4.8	12.4
16.5	Till — clay, silty, pebbly, gray-brown; grades to gray at 14.0'	3	2S	7.0--8.5	18	24	5.2+	17.9
21.5	Sand, fine to medium, brown, wet	4	2S	9.5--11.0	18	28	5.2+	11.5
27.5	Till — clay, silty, brown	5	2S	12.0--13.5	18	17	3.4	18.9
41.5	Till — clay, silty, pebbly, gray; sand seams 32'-35'	6	2S	14.5--16.0	12	22	1.9	19.2
49.5	Silt, sandy, gray; little clay, pebbles	7	2S	17.0--18.5	11	25		
52.0	Till — silt, clayey, gray; trace sand	8	2S	19.5--21.0	15	32		
59.5	Till — silt, clayey, gray; some sand	9	2S	22.0--23.5	12	13	1.9	18.5
		10	2S	24.5--26.0	16	25	1.3	22.1
		11	2S	27.0--28.5	18	11	2.9	18.5
		12	2S	29.5--31.0	18	20	4.5	18.9
		13	2S	32.0--33.5	15	26	2.5	15.3
		14	2S	34.5--36.0	0	29	3.3	20.4
		15	2S	37.0--38.5	11	18		21.8
		16	2S	39.5--41.0	10	16		
		17	2S	42.0--43.5	18	15		15.4
		18	2S	44.5--46.0	12	20		15.7
		19	2S	47.0--48.5	15	23		16.2
		20	2S	49.5--51.0	12	32		16.1
		21	2S	52.0--53.5	9	17	3.5	11.6
		22	2S	54.5--56.0	12	21	5.0	22.3
		23	2S	57.0--58.6	16	29	2.5	18.6

(Continued)

DRILLING RECORD FOR DUP 40N11E-2.1h - Continued

Depth (ft)	Description of material	Samples					
		No.	Type	Depth (ft)	Recovery ery (in.)	Blows/ft drop hammer	Qu
64.0	Silt, clayey, gray-brown, with gray silt lenses	24	2S	59.5—61.0	18	33	7.9 19.5
		25	2S	62.0—63.5	10	28	2.7 45.8
		26	2S	64.5—66.0	18	29	9.3 11.9
		27	2S	67.0—68.5	18	67	2.9 11.9
		28	2S	69.5—71.0	0	85	9.7 10.8
	Till — silt, clayey, gray; trace sand and gravel; grades to sandy silt at 82'	29	2S	72.0—73.5	7	139	12.1
		30	2S	74.5—75.3	10	150/10"	6.0 7.5
83.5		31	SS	77.0—77.5	4	122/6"	
		32	SS	79.5—80.0	5	130/6"	6.9
89.0	Sand, fine, gray	33	SS	82.0—83.0	12	136	7.2
91.0	Till — silt, gray; trace fine sand	34	SS	84.5—86.0	10	73	
		35	SS	87.0—88.5	0	96	
		36	SS	89.5—91.0	8	120	11.6
		37	SS	92.0—93.5	17	99	7.0 9.8
	Till — silt, clayey, gray; sandy pebbles	38	SS	94.5—96.0	10	50	2.5 9.5
101.0		39	SS	97.0—98.5	11	115	4.0 8.8
		40	SS	99.5—101.0	9	165	6.8

SIZE DISTRIBUTION DATA FOR DUP 40N11E-2.1h

Sample	%	Cohesive Materials			Size distribution of portion < 2.0 mm		
		> 2.0 mm	% < 2.0 mm	% >.062 mm	% >.004 mm	% <.004 mm	
2A	55.00		95.0	29	43	28	
3B	1.0		99.0	30	46	24	
4A	3.0		97.0	23	40	37	
6	3.0		97.0	12	40	48	
10A	3.0		97.0	18	41	41	
11A	6.0		94.0	15	43	42	
12A	5.0		95.0	15	43	42	
16	4.0		96.0	10	46	44	
18A	6.0		94.0	26	51	23	
20A	0.0		100.0	2	68	30	
22	1.0		99.0	6	32	62	
23A	0.0		100.0	4	39	57	
24A	0.0		100.0	2	47	51	
25A	0.0		100.0	3	42	55	
26B	3.0		97.0	3	46	51	
30	9.0		91.0	29	49	22	
32	14.0		86.0	30	52	18	
34B ₀	0.0		100.0	75	23	2	
36	2.0		98.0	18	69	13	
37A	13.0		87.0	30	47	23	
40	18.0		82.0	34	45	21	

Noncohesive Materials

Sample	Percentage retained on sieve										
	4	9	16	24	32	42	60	80	115	170	Pan
7	0.8	1.6	0.5	0.2	0.4	3.7	53.3	28.0	4.2	1.4	5.9
8	0.7	1.1	0.8	0.3	0.5	3.4	52.0	33.0	4.7	1.1	3.3
34U	0.0	0.4	1.1	0.7	1.5	3.8	13.2	18.7	18.0	9.4	33.2

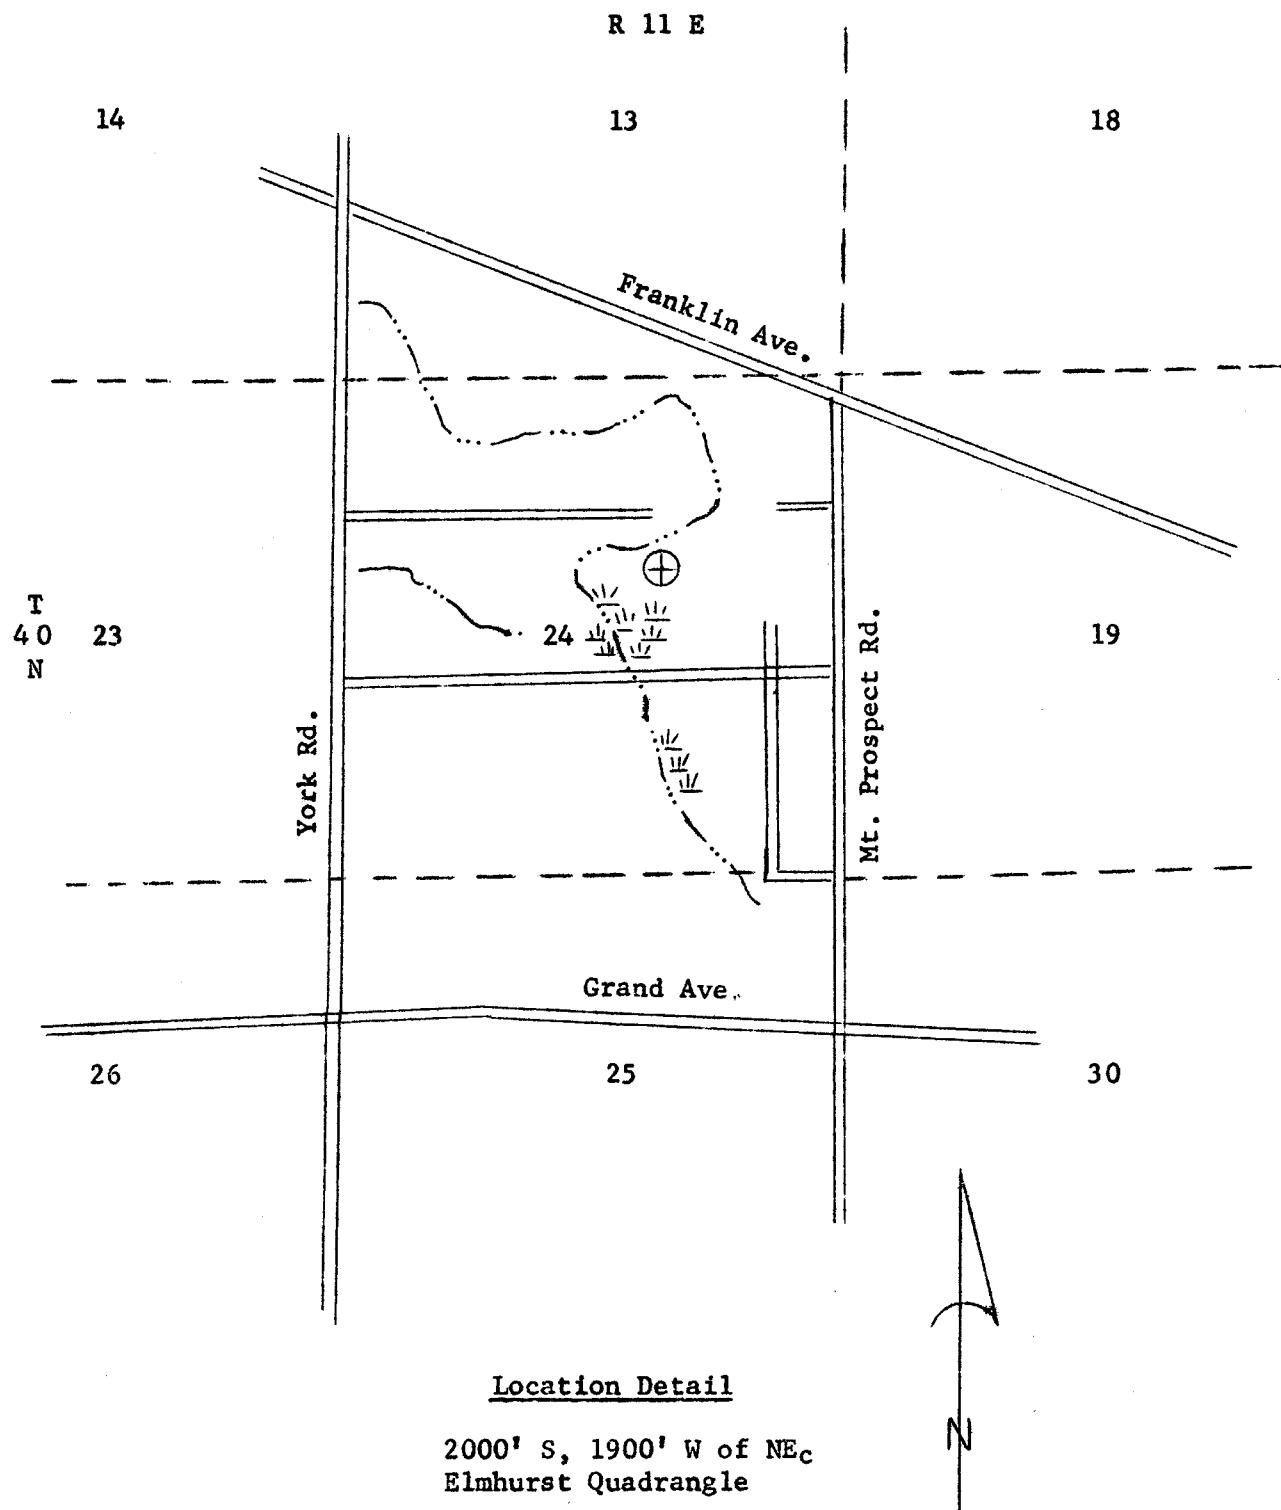


Fig. 9. - Location of boring DUP 40N11E-24.3e.

DRILLING RECORD FOR DUP 40N11E-24.3e

Surface elevation: 658.0 feet
 Date started: 11-9-62
 Date completed: 11-12-62

Hammer weight: 140 pounds
 Hammer drop: 30 inches
 Boring method: Hollow auger

Depth (ft)	Description of material	Samples						
		No.	Type	Depth (ft)	Recovery ery (in.)	Blows/ft drop hammer	Qu	MC
3.0	Topsoil, black, organic	1	2S	2.5-4.0	4	7		18.4
4.5	*	2	2S	4.5-6.0	8	3		5.7
6.5	Sand, silty, gray; a few organic traces	3	2S	7.0-8.5	12	29		9.8
7.5	Sand, clayey, gray, firm	4	2S	9.5-11.0	18	30		20.6
10.0	**	5	2S	12.0-13.5	18	27		
13.5	Silt, gray	6	2S	14.5-16.0	12	13		16.2
16.5	Silt, clayey, gray; trace sand and gravel (till?)	7	2S	17.0-18.5	12	18	1.9	18.9
	Till — clay, silty, gray; trace shale sand	8	2S	19.5-21.0	18	19	2.1	16.5
		9	2S	22.0-23.5	18	18	1.4	19.6
		10	2S	24.5-26.0	12	18	2.5	19.2
30.0		11	2S	27.0-28.5	18	23	3.6	15.0
		12	2S	29.5-31.0	18	30	4.2	16.3
		13	2S	32.0-33.5	18	27	1.8	18.3
		14	2S	34.5-36.0	18	29	5.2	17.1
		15	2S	37.0-38.5	18	53	4.5+	18.0
		16	2S	39.5-41.0		39		
44.0	Clay, silty, gray, hard, with layers of dark gray to black fine stratified sand	17	2S	42.0-43.5	18	57	4.6	14.9
		18	2S	44.5-46.0	18	52	5.2+	12.9
47.5	Till — clay, silty, gray; trace sand and gravel	19	2S	47.0-48.5	18	141	4.5+	13.8
49.0	***	20	2S	49.5-51.0	18	271	5.2+	
51.5	Till — silt, clayey, gray, pebbly; very compact							

* Silt, clayey, gray and brown mottled; local wash

** Sand, fine, dark gray, dry; stratified

*** Till — silt, gray; trace fine sand


(Continued)

DRILLING RECORD FOR DUP 40N11E-24.3e - Continued

Depth (ft)	Description of material	Samples					
		No.	Type	Depth (ft)	Recovery (in.)	Blows/ft drop hammer	Qu
61.9	Till - silt, clayey, gray; trace sand and gravel	21	2S	52.0-53.5	15	101	5.2+
		22	2S	54.5-56.0	16	135	5.2+ 9.1
		23	2S	57.0-58.5	18	106	5.2+ 10.8
		24	2S	59.5-61.0	18	68	5.2+ 14.3
		25	2S	62.0-62.5	3	200	

SIZE DISTRIBUTION DATA FOR DUP 40N11E-24.3e

Sample	Cohesive Materials					
	Size distribution of portion < 2.0 mm			< .004 mm		
	% > 2.0 mm	% < 2.0 mm	% >.062 mm	% >.004 mm	% <.004 mm	
2	7.0	93.0	48	33	19	
3	5.0	95.0	70	26	4	
4	1.0	99.0	5	88	7	
5A	0.0	100.0	16	74	10	
5B	0.0	100.0	1	88	11	
6A	8.0	92.0	43	44	13	
6B	2.0	98.0	21	64	15	
7	5.0	95.0	14	43	43	
8	14.0	86.0	15	42	43	
9	3.0	97.0	15	41	44	
10	10.0	90.0	11	43	46	
11	9.0	91.0	23	48	29	
12	3.0	97.0	17	40	43	
13	1.0	99.0	29	41	30	
14A	2.0	98.0	58	30	12	
14B	1.0	99.0	9	42	49	
15	1.0	99.0	6	42	52	
16	0.0	100.0	9	57	34	
17	7.0	93.0	25	54	21	
18	9.0	91.0	26	50	24	
19	16.0	84.0	26	53	21	
20	17.0	83.0	30	49	21	
21	24.0	76.0	39	46	45	
22	16.0	84.0	29	48	23	
23	4.0	96.0	15	43	42	
24	4.0	96.0	14	43	43	

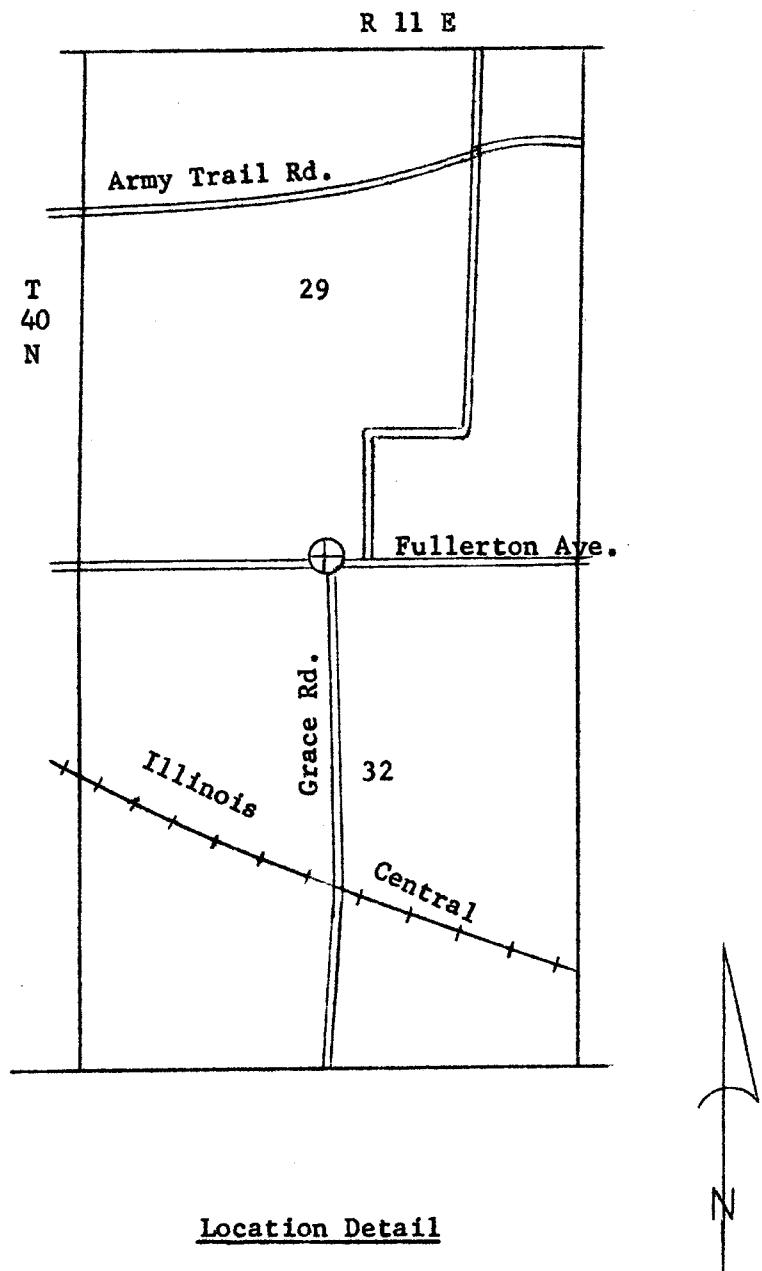

350' W cL Grace Road
18' N cL Fullerton Avenue
2250' E, 18' N of SW_c
Lombard Quadrangle

Fig. 10. - Location of boring DUP 40N11E-29.5a.

DRILLING RECORD FOR DUP 40N11E-29.5a

Surface elevation: 695.0 feet
Date started: 12-10-62

Hammer weight: 140 pounds
Hammer drop: 30 inches
Boring method: Hallow auger

Depth (ft)	Description of material	Samples					
		No.	Type	Depth (ft)	Recover- ery (in.)	Blows/ft drop hammer Qu	MC
1.5	Topsoil, black	1	2S	2.0—3.5	12	32	9.7+ 14.1
	Till — clay, silty, brown; trace sand, pebbly; grades to darker brown below 8'	2	2S	4.5—6.0	14	28	4.7 18.5
		3	2S	7.0—8.5	14	27	6.8 20.2
		4	2S	9.5—11.0	12	28	7.2 18.6
12.5		5	2S	12.0—13.5	18	44	6.6 18.4
	Till — clay, sandy, gray; gravelly seams; a few silt partings	6	2S	14.5—16.0	18	20	3.7 14.6
16.5		7	2S	17.0—18.5	10	43	
		8	2S	19.5—21.0	12	14	
		9	2S	22.0—23.5	12	40	
		10	2S	24.5—26.0	12	18	
		11	SS	29.5—31.0	12	18	
		12	SS	34.5—36.0	8	14	
		13	SS	39.5—41.0	10	15	
		14	SS	44.5—46.0	8	16	
	Sand, gravelly, dark gray; grades to fine to medium at 25' and fine at 35'	15	SS	49.5—51.0	10	28	
		16	SS	54.5—56.0	10	35	
		17	SS	59.5—61.0	10	44	
		18	SS	64.5—66.0	0	52	
		19	SS	69.5—71.0	8	65	
		20	SS	74.5—75.5	2	150/14"	
60.0		(Sample 20 description continued on next page.)					

DRILLING RECORD FOR DUP 40N11E-29.5a - Continued

Depth (ft)	Description of material	Samples					
		No.	Type	Depth (ft)	Recovery (in.)	Blows/ft drop hammer	Q _u
72.5	Gravel, sandy, fine to coarse, gray	20	(Continued)				
	Gravel, coarse, gray; cobbles and boulders						

SIZE DISTRIBUTION DATA FOR DUP 40N11E-29.5a

Sample	Cohesive Materials					
	% > 2.0 mm	% < 2.0 mm	Size distribution of portion < 2.0 mm			
		% >.062 mm	% >.004 mm	% <.004 mm		
2	4.0	96.0	12	39	49	
4	5.0	95.0	15	43	42	
5A	7.0	93.0	17	46	37	
6A	15.0	85.0	46	37	17	
9B	15.0	85.0	55	32	13	

Noncohesive Materials

Sample	Percentage retained on sieve										
	4	9	16	24	32	42	60	80	115	170	Pan
7	25.4	24.4	19.9	8.7	8.6	5.2	2.7	0.9	0.8	0.6	2.8
8	8.2	9.5	19.5	11.3	14.0	9.8	15.6	6.9	1.6	0.8	2.8
9A	9.8	10.1	21.3	13.9	17.5	11.6	7.2	2.2	1.3	0.9	4.2
11	0.2	1.0	6.7	9.3	25.4	28.0	13.8	3.8	2.6	1.5	1.7
13	0.0	0.1	0.1	0.3	6.4	22.1	36.6	15.9	8.0	3.2	7.3
15	22.1	7.4	7.6	8.0	23.3	17.0	6.4	2.0	1.4	0.8	4.0
17	6.9	14.5	14.7	7.2	9.8	13.7	15.7	5.3	2.8	1.7	7.7
19	40.5	12.0	14.1	5.8	6.4	4.3	3.5	2.0	1.8	1.5	8.1

